




## BV202- 1/2" ATMOSPHERIC VACUUM BREAKER.

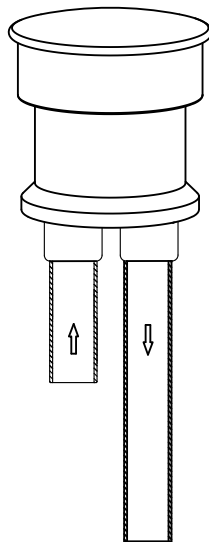

### INSTALLATION INSTRUCTION:

THE BV 202-10 IS A 1/2" VACUUM BREAKER

THE INLET AND OUTLET ARE 1/2" COPPER PIPE

#### OPERATION SPECIFICATIONS:

PRESSURE: 65 P.S.I. 4.5 BAR

MAXIMUM : 125 P.S.I. 8.6 BAR

MINIMUM : 40 P.S.I. 2.76 BAR

#### HOTWATER TEMPERATURE:

MAXIMUM TEMPERATURE: 140°F/ 60 °

MAX. VALVE SETTING: 120°F/ 49°C

THE BV635 DIVERTER VALVE IS CERTIFIED TO  
CSA. B125 AND ASSE STANDARD AS WELL TO  
CEC CALIFORNIA ENERGY COMMISSION



BREDAVALVE® is a registered trademark, USA. & CAN. patent pending, and complies to C.S.A., A.S.S.E.& I.A.P.M.O.

NOTE: OMNI BRASS INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT PRIOR NOTICE

JUNE 1- 2019