





BV216

3/4" HIGH FLOW RIM MOUNT BACK FLOW PREVENT



020.2200
16T. SPLINE

008.2700
9/16 20UN -2A

1/4"-20 UNC-2B

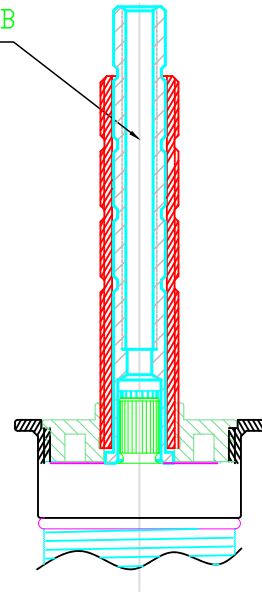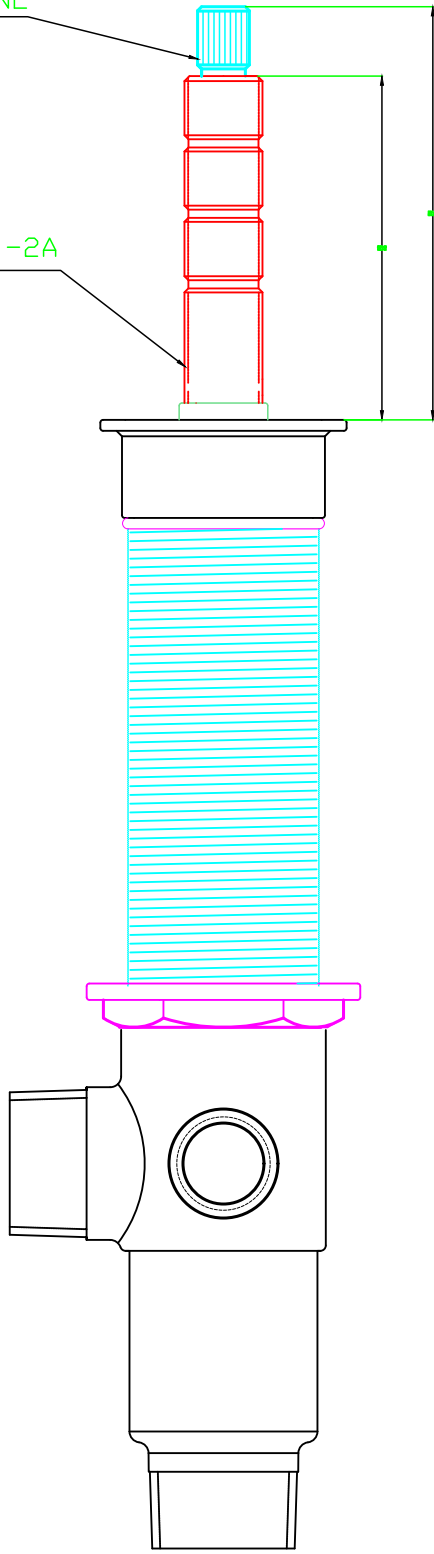

1/4"-20UNC-2B

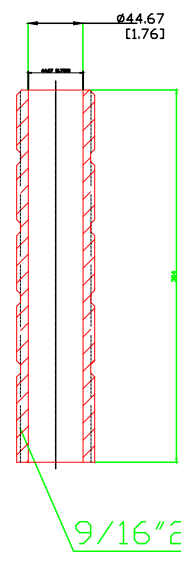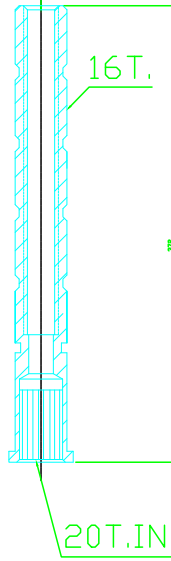

020.2200

008.2700

Max operating temp.....160F / 71C
Max. operating pressure.....125psi / 861Kpa.
Flow rate..... 18gpm at 65 psi



BREDAVALVE® IS A REGISTERED TRADE MARK, USA AND CANADIAN PATENT PENDING COMPLY TO CSA, ASSE. STANDRD
NOTE: MANUFACTURE RESEVES THE RIGHT TO MAKE CHANGS WITHOUT PRIOR NOTICE

OPTION 1