



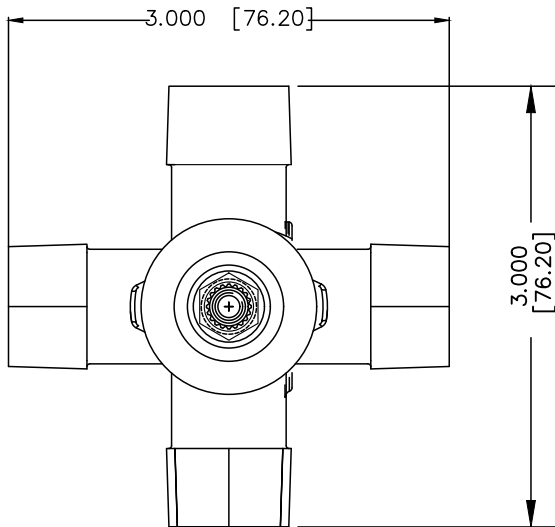

# BV631 – 1/2" SHOWER DIVERTER

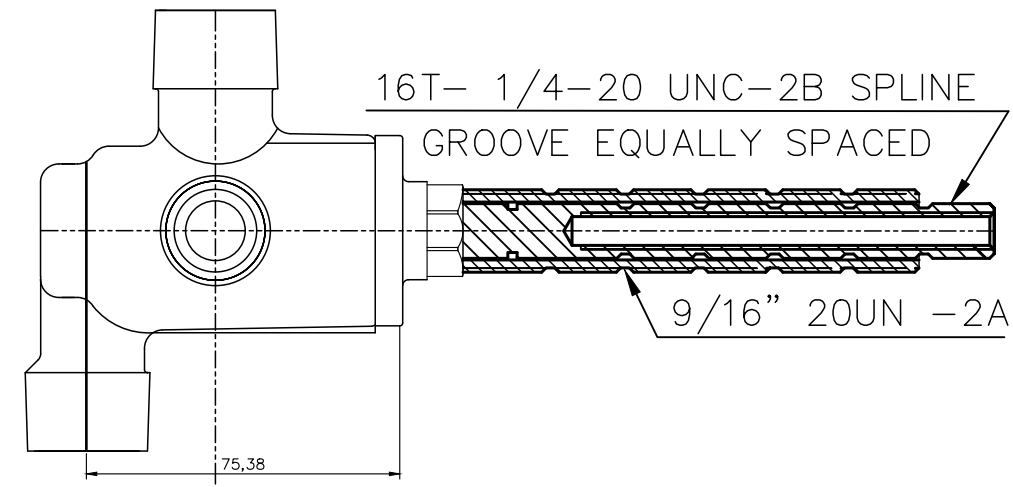

## INSTALLATION INSTRUCTION:


THE BV631 IS A 1/2" SHOWER DIVERTER

WITH ONE INLET AND 3 OUTLETS.

THE PORTS ARE RIMMED FOR 1/2" COPPER PIPE THE OUTSIDE ARE 1/2" N.P.T. THREAD. WHEN SOLDERING DO NOT OVER HEATING THE BODY IT MAY DAMAGE THE CARTRIDGE.

THE CARTRIDGE IS AVAILABLE IN 2 MODE SHARING AND NO SHARING

THE SPLINE AND SLEEVE HAVE GROOVE THAT CAN BE CUSTOM CUT.

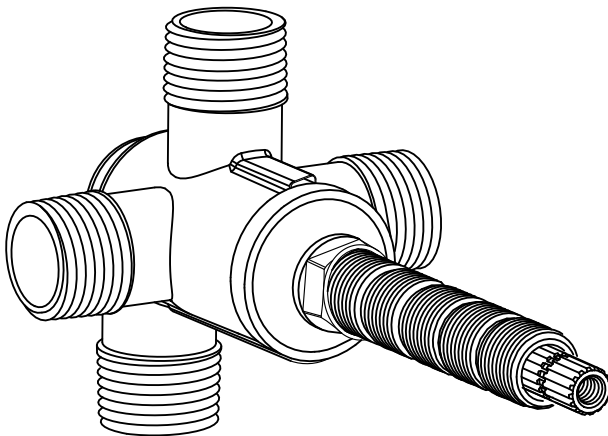

## OPERATION SPECIFICATIONS:

PRESSURE: 65 P.S.I. 4.5 BAR  
MAXIMUM : 125 P.S.I. 8.6 BAR  
MINIMUM : 40 P.S.I. 2.76 BAR  
FLOW RATE 10 GPS AT 65 P.S.I.

## HOTWATER TEMPERATURE:

MAXIMUM TEMPERATURE: 140°F/ 60 °  
MAX. VALVE SETTING: 120°F/ 49°C

THE BV635 DIVERTER VALVE IS CERTIFIED TO CSA. B125 AND ASSE STANDARD AS WELL TO CEC CALIFORNIA ENERGY COMMISSION