

BV216

2-Way Diverter Valve with Back Flow Preventer Special Notes:

The BV216 is a 2-outlet, 2-mode, deck-mounted diverter valve with an integral back flow preventer. It's ideal for large tub applications such as whirlpools and soaker type bathtubs where the user wishes to smoothly switch between spouts, hand showers, or other fixtures. This diverter valve offers a seamless switchover eliminating waterhammer. It also features a patented removable back flow preventer cartridge serviceable from above the deck. For sample installation possibilities, see the **Whirlex Applications Page**.

- This standard spline is a 20-toothed broach, but can be customized according to manufacturer's specifications to fit any handle.
- This **BREDAVALVE®** is easily serviceable above. It's specially designed to utilize a single, convenient, removable patented cartridge. No special tools are required for servicing or installation.
- Certified to CSA and ASSE Standards


BV220 Valve Specifications:

Max operating tem.....160°F/71°C

Max operating pressure.....125psi/861Kpa

Patented: USA 11/284, 964

CA 2, 488, 455

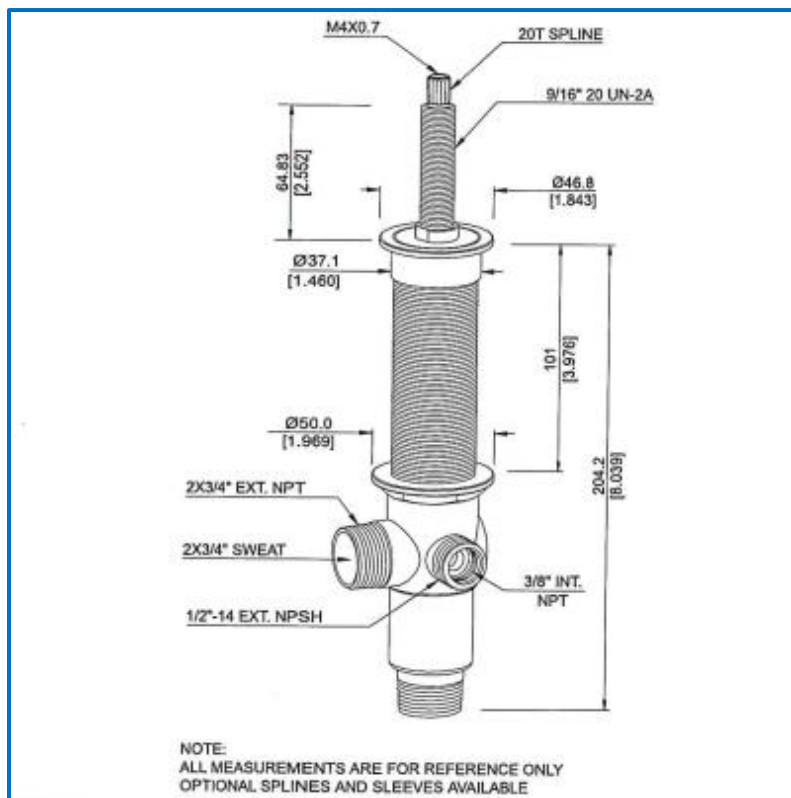

COMPLIANCE & APPROVALS

All **BREDAVALVE®** are certified to the standard requirements of CSA and ASSE. The certification program allows the **BREDAVALVE®** to meet all North American plumbing codes, Federal, State/Provincial and Municipal. Please check your local plumbing codes for any additional requirements.

Omni Brass Inc. 8888 Keele St. Unit #22-A Concord, Ontario, Canada L4K 2N2
 TELEPHONE (905) 760-9909 FAX (905) 760-2675 www.omnibrass.com