
BV631

3-Outlet Bath/Shower Diverter Valve

The BV631 is a very versatile diverter valve. Its 3 outlet allow for multiple shower options between shower heads, hand showers, tub spouts, etc. without a confusing array of valves and controls. It's a compact 3-outlet mode, 5-mode wall-mounted diverter valve. It has the unique ability to have 2 adjacent outlets operating at the same time and still achieve a high-flow rate through both ports. This diverter valve has a positive detent and allows for gradual turnovers from one port to another eliminating waterhammer. This valve has a flow rate capable of handling volumes in excess of 14 gpm at 45 p.s.i.

The BV631 can be converted to a 2-outlet, 3-mode configurations simply by changing one washer (supplied) for right or left hand application. It's easy to install with its intuitive progressive control and positive mode detents.

For applications with thermostatic valves, consider the **BV651**. It's not only a diverter valve, but it also has an internal ceramic stop, which eliminates the need for a separate volume control. Although the applications of the BV631 are nearly limitless, consult the **ShowerTek Applications Page** for sample installations.

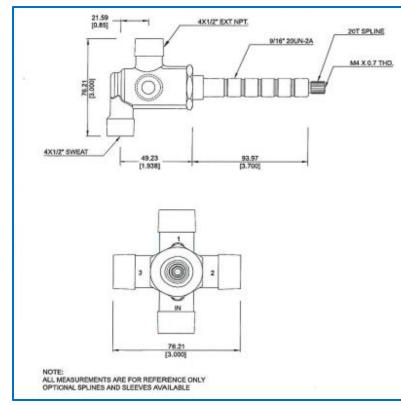


Special Notes:


- This standard spline is a 20-toothed broach, but can be customized according to manufacturer's specifications to fit any handle.
- This BREDAVALVE® is easily serviceable above. It's specially designed to utilize a single, convenient, removable patented cartridge. No special tools are required for servicing or installation.
- Certified to CSA and ASSE Standards

BV220 Valve Specifications:

Max operating tem......160°F/71°C Max operating pressure......125psi/861Kpa

Patented: Patent Pending USA, CSA





COMPLIANCE & APPROVALS

All BREDAVALVE® are certified to the standard requirements of CSA and ASSE. The certification program allows the BREDAVALVE® to meet all North American plumbing codes, Federal, State/Provincial and Municipal. Please check your local plumbing codes for any additional requirements.

Omni Brass Inc.8888 Keele St.Unit #22-A Concord, Ontario, Canada L4K 2N2TELEPHONE (905) 760-9909FAX (905) 760-2675www.omnibrass.com

Omni Brass Inc. reserves the right to change, modify or discontinue product design or construction without prior notice. Reproduction of this material in whole or in part without written consent of Omni Brass Inc. is strictly prohibited. Printed in Canada ©Omni Brass Inc.