



Benefits/features

- 2-outlet, 2-mode, deck-mounted diverter valve.
- Integral back flow preventer.
- Cartridge easily accessible from above deck.
- Corrosion-resistant, all brass body.
- Standard 3/4" (tub) threaded and sweat connections.
- Standard 1/2" M and 3/8" F threaded connections for hand shower outlet.
- Seamless switchover from mode to mode eliminates waterhammer.
- Spline and sleeve can be custom ordered.
- Trim Package available
- Flow rate for 3/4" outlet is over 23 GPM @ 45 p.s.i. and for the hand shower outlet it is over 16 GPM @ 45 p.s.i.

VALVETECHNOLOGYTHATFITS

BV216

2-Way Diverter Valve with
Back Flow Preventer



BV216

2-Way Diverter Valve with Back Flow Preventer

The BV216 is a 2-outlet, 2-mode, deck-mounted diverter valve with an integral back flow preventer. It's ideal for large tub applications such as whirlpools and soaker type bathtubs where the user wishes to smoothly switch between spouts, hand showers, or other fixtures. This diverter valve offers a seamless switchover eliminating waterhammer. It also features a patented removable back flow preventer cartridge serviceable from above the deck. For sample installation possibilities, see the [Whirlex Applications Page](#).




Special Notes:

- The standard spline is a 20-toothed broach, but can be customized according to manufacturers' specifications to fit any handle.
- This **BREDAVALVE®** valve is easily serviceable from above the deck. Its special design utilizes a single convenient, removable patented cartridge. No special tools are required for servicing or installation.
- Certified to CSA, IAPMO, and ASSE Standards.

BV216 Valve Specifications

Max operating temp.....160°F/71°C
 Max operating pressure.....125psi/861Kpa

Patented: USA 11/284,964
 CA 2,488,455

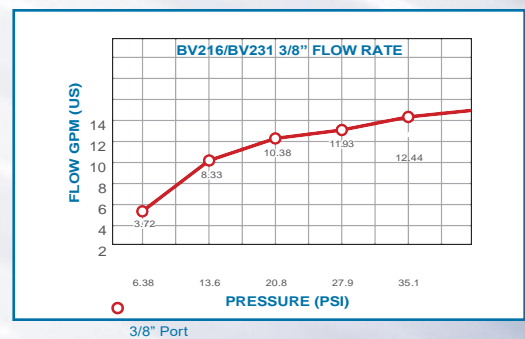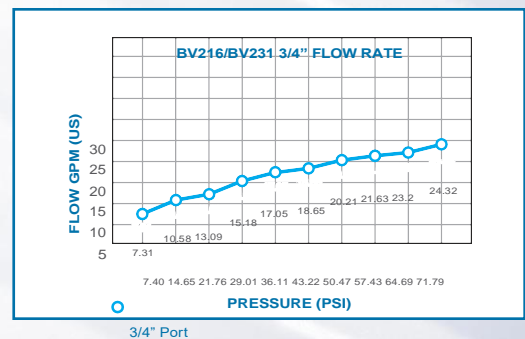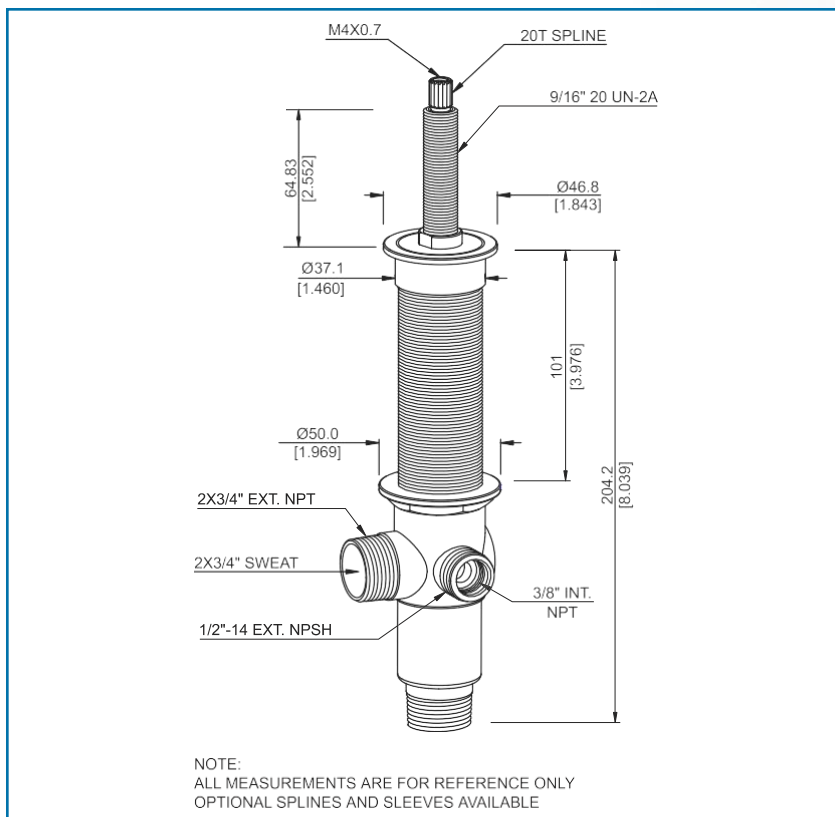

Compliance & Approvals

All **BREDAVALVES®** are certified to the standard requirements of CSA, IAPMO and ASSE. The certification program allows the **BREDAVALVE®** to meet all North American plumbing codes, Federal, State/Provincial and Municipal. Please check your local plumbing codes for any additional requirements.

Omni Brass Inc. 8888 Keele Street Unit #22-A, Concord, Ontario, Canada L4K 2N2
 TELEPHONE 905.760.9909 FAX 905.760.2675 www.omnibrass.com